



Secom

RELIABLE. SECURE. BUILT TO LAST.

STANDARD FEATURES

- NON-CONTACT OBSTACLE DETECTION WITH SAFE AUTO LOWERING
- AUTO/MANUAL MODE OPERATION
- DIRECTIONAL ARMING LOGIC FOR EFFICIENT TRAFFIC FLOW
- 2 WIRE GALVANICALLY ISOLATED MULTI-DROP SERIAL COMMUNICATION (DES ENCRYPTION)
- 2 LOOP DETECTOR CONNECTORS
- 2 SOLID STATE POSITION SENSORS (UP & DOWN)
- LED DIAGNOSTIC INDICATORS, CONTINUOUS SELF-TEST
- THERMAL OVERLOAD PROTECTION WITH MANUAL RESET
- MANUAL TEST SWITCH FOR MOTOR & LIMIT FUNCTIONS

BARRIER GATE ONLINE WITH CONTROLLER

GATE REPORTS REAL TIME EXCEPTIONS:

- ONLINE
- OFFLINE
- POWER OFF
- LOOP COUNTS
- GATE MANUALLY RAISED / LOWERED
- BROKEN GATE SENSED AND REPORTED
- LOOP REPORTING WHEN BYPASSED MANUALLY
- GATE OPENED REMOTELY VIA A COMMAND
- ANY COMMUNICATION FAILURE ...



SECOM INTERNATIONAL, INC.
15905 S BROADWAY, GARDENA CA., 90248
(310) 641-1290 sales@secomintl.com




MADE IN USA

304 STAINLESS STEEL, SHELL THICKNESS
20 GAUGE, STRUCTURE THICKNESS 13
GAUGE

OPTIONAL FEATURES

- USA MADE ULTRASONIC SECONDARY SENSOR
- CUSTOM POWDER COAT FINISH OR POLISHED
- 8' TO 12' WOOD OR METAL COMPOSITE ARMS
- STRAIGHT OR ARTICULATING GATE ARMS
- ALARM INTEGRATION RAISES GATES



secomintl.com

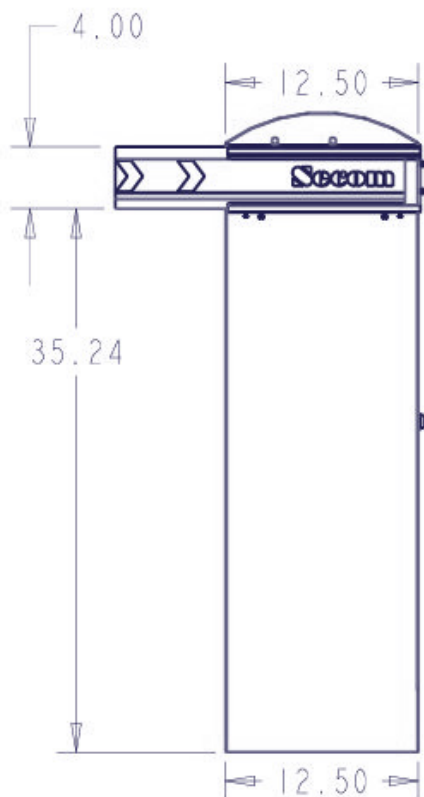

Parameter	Description
Dimensions:	12" W x 41" H x 12" D
Weight:	143 lbs.
Operating Voltage:	115 v AC, SINGLE-PHASE, 60 HZ
Operating Temp.:	Operates to -50c without the heater
Ingress Protection:	IP65 Rated
Power:	Dual 115V AC grounded outlets
Max Throughput:	1440 Cycles Per Hour
Communication:	Secure two-wire communication with galvanic isolation and DES encryption
Motor:	1/3 HP, Instant reversing, continuous duty
Drive System:	Harmonic crank with non ferrous components
Certification:	Manufactured to meet or exceed UL325 requirements CE / FCC part 15 Compliant, REACH

Support	Details
Warranty:	2 years on mechanical and electrical items; 10 years on corrosion to metal
Warranty Exclusions:	Loop detectors, consumables such as gate arms, except manufacturing defect
Install/ Maintenance:	Predrilled mounting, low maintenance design, self tuning, minimal lubrication
Phone Support:	Troubleshooting guidance free of charge

SE-GATE OPERATOR SIGNATURE STAINLESS STEEL SECOM EQUIPMENT

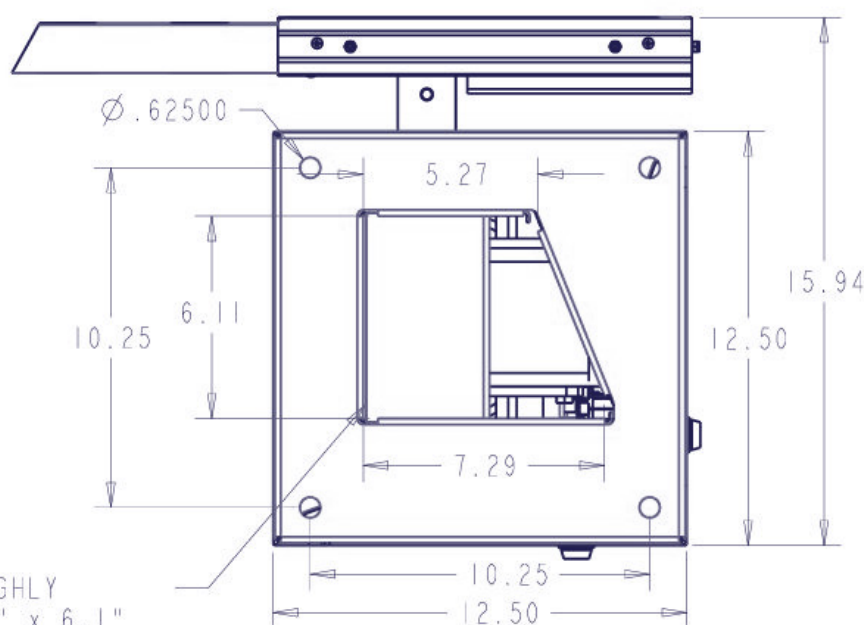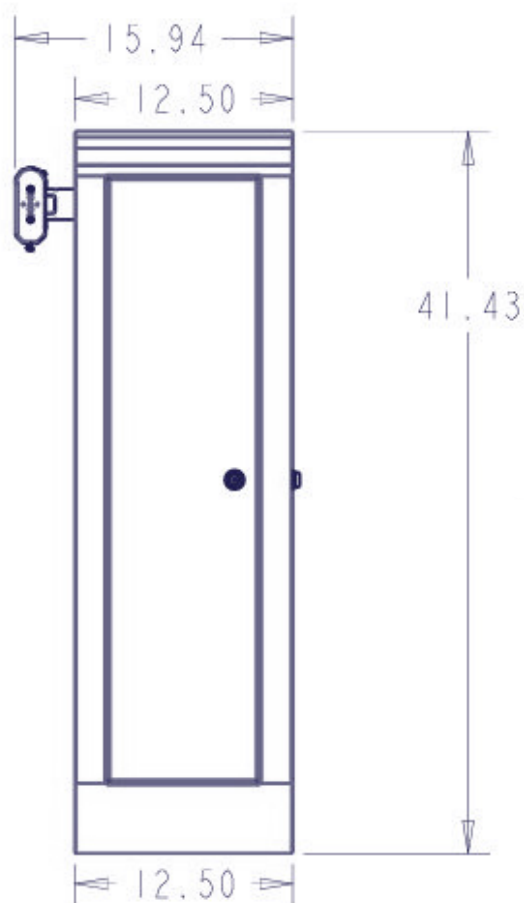

ROUGHLY
5.2" x 6.1"
BOTTOM OPENING